


ASTINtrew®

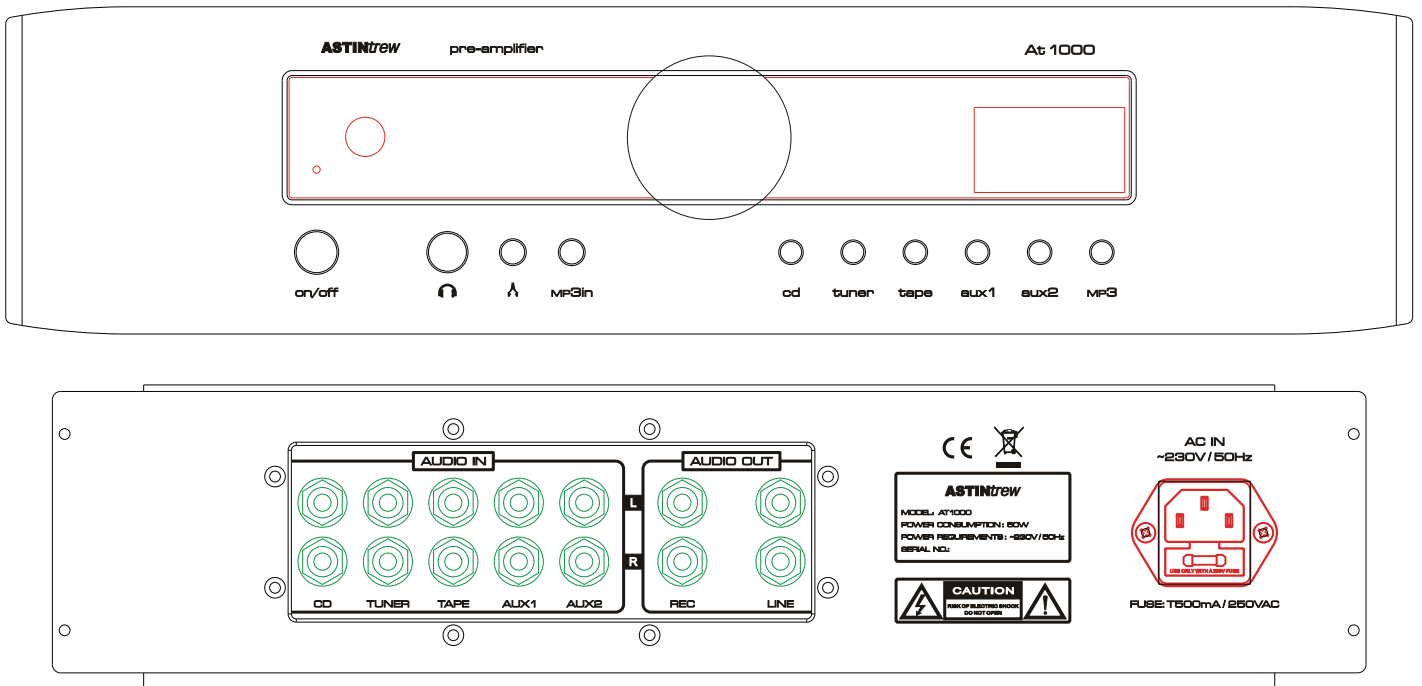

AT1000 Valve Pre-amplifier and headphone amplifier

Pre-amplifier gain:	+18db
Maximum output:	20V (RMS)
Frequency response:	+0 / - 3 db 10-80,000 Hz
Total Harmonic Distortion:	0.3% at 5v (RMS) 20-20,000 Hz
Input impedance:	47K ohm
Output impedance:	600 ohm
Signal to noise ratio:	95 db A weighted
Valve:	1 x ECC82 (12AU7) Electro-Harmonix per channel (25,000 hrs recommended replacement period)
Headphone amplifier:	Single ended class A
Mains voltage:	220-240V at 50Hz
Power consumption:	50VA
Dimensions:	W 430mm D 346mm Ht 110mm inc. feet
Net Weight:	7 Kg